

TYPE: GMV-M-D-F01

FIXED MALE KNUCKLE THREAD DIN 405

TYPE

- Fixed male knuckle thread DIN 405
- Used in the food, chemical, and pharmaceutical industries

STANDARD


- DIN 405
- DIN 11851

MATERIAL

- SS AISI 316 (w.nr. 1.4401) or SS AISI 304 (w.nr. 1.4301)

OTHER SPECIFICATION

- Material certificate acc. EN 10204:2004 type 3.1
- Optional: NBR seal

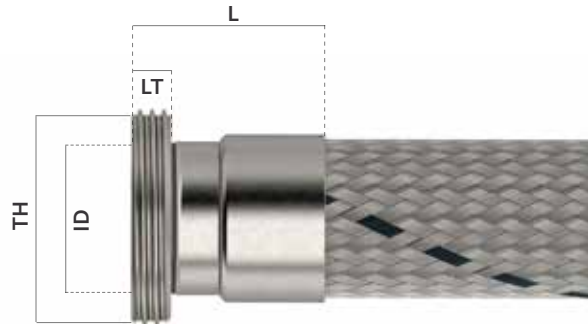

TYPE: GMV-M-D-F01

| Code | For hose ID | | L | | TH | LT | | ID | |
|-------------------------|-------------|--------|------|------|---------------|------|------|-------|------|
| | NB | inch | mm | inch | | mm | inch | mm | inch |
| GMV-M-D-F01-Rd 34x1/8" | DN12 | 1/2" | 42.0 | 1.65 | Rd 34 x 1/8" | 12.0 | 0.47 | 16.0 | 0.63 |
| GMV-M-D-F01-Rd 44x1/6" | DN20 | 3/4" | 45.0 | 1.77 | Rd 44 x 1/6" | 14.0 | 0.55 | 22.0 | 0.87 |
| GMV-M-D-F01-Rd 52x1/6" | DN25 | 1" | 51.5 | 2.03 | Rd 52 x 1/6" | 15.6 | 0.61 | 26.0 | 1.02 |
| GMV-M-D-F01-Rd 58x1/6" | DN32 | 1 1/4" | 57.7 | 2.27 | Rd 58 x 1/6" | 15.6 | 0.61 | 32.1 | 1.26 |
| GMV-M-D-F01-Rd 65x1/6" | DN40 | 1 1/2" | 59.1 | 2.33 | Rd 65 x 1/6" | 14.4 | 0.57 | 38.0 | 1.50 |
| GMV-M-D-F01-Rd 78x1/6" | DN50 | 2" | 62.0 | 2.44 | Rd 78 x 1/6" | 15.7 | 0.62 | 50.2 | 1.98 |
| GMV-M-D-F01-Rd 95x1/6" | DN65 | 2 1/2" | 66.2 | 2.61 | Rd 95 x 1/6" | 16.5 | 0.65 | 66.0 | 2.60 |
| GMV-M-D-F01-Rd 110x1/4" | DN80 | 3" | 75.2 | 2.96 | Rd 110 x 1/4" | 19.9 | 0.78 | 81.0 | 3.19 |
| GMV-M-D-F01-Rd 130x1/4" | DN100 | 4" | 84.0 | 3.31 | Rd 130 x 1/4" | 20.0 | 0.79 | 101.0 | 3.98 |
| GMV-M-D-F01-Rd 160x1/4" | DN125 | 5" | 76.0 | 2.99 | Rd 160 x 1/4" | 24.0 | 0.94 | 125.0 | 4.92 |
| GMV-M-D-F01-Rd 190x1/4" | DN150 | 6" | 80.0 | 3.15 | Rd 190 x 1/4" | 28.0 | 1.10 | 150.0 | 5.91 |